


1.5SMC-Q Series

Surface Mount – 1500W



Additional Information

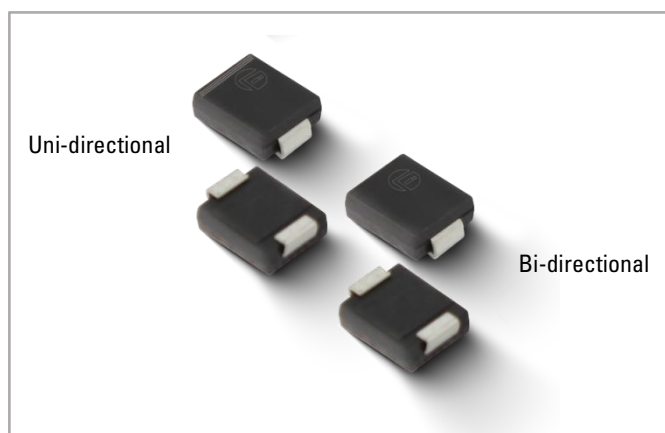

Resources



Accessories



Samples

Maximum Ratings and Thermal Characteristics

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation by 10/1000 μs Waveform(Fig.1)(Note1)(Note2) -Single Die Parts	P_{PPM}	1500	W
Power Dissipation on Infinite Heat Sink at $T_L=50^{\circ}\text{C}$	P_D	6.5	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	200	A
Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only (Note 4)	V_F	3.5/5.0	V
Operating Temperature Range	T_J	-55 to 150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to 150	$^{\circ}\text{C}$
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	15	$^{\circ}\text{C}/\text{W}$
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	75	$^{\circ}\text{C}/\text{W}$

Notes:

1. Non-repetitive current pulse, per Fig.3 and derated above T_J (initial) $\approx 25^{\circ}\text{C}$ per Fig.2.
2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
4. $V_F < 3.5\text{V}$ for single die parts and $V_F < 5.0\text{V}$ for stacked-die parts.

Description

The 1.5SMC-Q series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.


Features

- High reliability application and automotive grade AEC-Q101 qualified
- 1500W peak pulse power capability at 10/1000 μs waveform, repetition rate (duty cycles):0.01%
- Excellent clamping capability
- Low incremental surge resistance
- Typical I_R less than 1 μA when $V_B \text{ min} > 12\text{V}$
- For surface mounted applications to optimize board space
- Low profile package
- Built-in strain relief
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- ESD protection of data lines in accordance with IEC 61000-4-2, 30kV(Air), 30kV (Contact)
- EFT protection of data lines in accordance with IEC61000-4-4
- Fast response time: typically less than 1.0ps from 0V to $V_B \text{ min}$
- Glass passivated chip junction
- High temperature to reflow soldering guaranteed: 260 $^{\circ}\text{C}$ /20~40sec.
- $V_B @ T_J = V_B @ 25^{\circ}\text{C} \times (1 + \alpha T_J - 25)$ (α T:Temperature Coefficient, typical value is 0.1%)
- Meet MSL level1, per J-STD-020, LF maximum peak of 260 $^{\circ}\text{C}$
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

Applications

TVS devices are ideal for the protection of I/O Interfaces, V_{CC} bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Functional Diagram

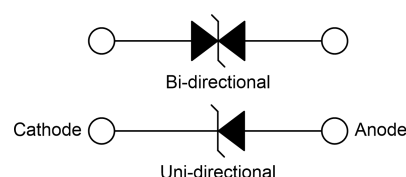

1.5SMC-Q Series

Surface Mount – 1500W

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number		Type	Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @ I_T		Test Current	Maximum Clamping Voltage @ I_{PP}	Peak Pulse Current	Reverse Leakage @ V_R
Uni.	Bi.		Uni.	Bi.		$V_{B\text{ Min. (V)}}$	$V_{B\text{ Max. (V)}}$				
1.5SMC6.8A	1.5SMC6.8CA	Q	6V8A	6V8C	5.80	6.45	7.14	10	10.5	144.8	1000
1.5SMC7.5A	1.5SMC7.5CA	Q	7V5A	7V5C	6.40	7.13	7.88	10	11.3	134.5	500
1.5SMC8.2A	1.5SMC8.2CA	Q	8V2A	8V2C	7.02	7.79	8.61	10	12.1	125.6	200
1.5SMC9.1A	1.5SMC9.1CA	Q	9V1A	9V1C	7.78	8.65	9.55	1	13.4	113.4	50
1.5SMC10A	1.5SMC10CA	Q	10A	10C	8.55	9.50	10.50	1	14.5	104.8	10
1.5SMC11A	1.5SMC11CA	Q	11A	11C	9.40	10.50	11.60	1	15.6	97.4	5
1.5SMC12A	1.5SMC12CA	Q	12A	12C	10.20	11.40	12.60	1	16.7	91.0	5
1.5SMC13A	1.5SMC13CA	Q	13A	13C	11.10	12.40	13.70	1	18.2	83.5	1
1.5SMC15A	1.5SMC15CA	Q	15A	15C	12.80	14.30	15.80	1	21.2	71.7	1
1.5SMC16A	1.5SMC16CA	Q	16A	16C	13.60	15.20	16.80	1	22.5	67.6	1
1.5SMC18A	1.5SMC18CA	Q	18A	18C	15.30	17.10	18.90	1	25.2	60.3	1
1.5SMC20A	1.5SMC20CA	Q	20A	20C	17.10	19.00	21.00	1	27.7	54.9	1
1.5SMC22A	1.5SMC22CA	Q	22A	22C	18.80	20.90	23.10	1	30.6	49.7	1
1.5SMC24A	1.5SMC24CA	Q	24A	24C	20.50	22.80	25.20	1	33.2	45.8	1
1.5SMC27A	1.5SMC27CA	Q	27A	27C	23.10	25.70	28.40	1	37.5	40.5	1
1.5SMC30A	1.5SMC30CA	Q	30A	30C	25.60	28.50	31.50	1	41.4	36.7	1
1.5SMC33A	1.5SMC33CA	Q	33A	33C	28.20	31.40	34.70	1	45.7	33.3	1
1.5SMC36A	1.5SMC36CA	Q	36A	36C	30.80	34.20	37.80	1	49.9	30.5	1
1.5SMC39A	1.5SMC39CA	Q	39A	39C	33.30	37.10	41.00	1	53.9	28.2	1
1.5SMC43A	1.5SMC43CA	Q	43A	43C	36.80	40.90	45.20	1	59.3	25.6	1
1.5SMC47A	1.5SMC47CA	Q	47A	47C	40.20	44.70	49.40	1	64.8	23.5	1
1.5SMC51A	1.5SMC51CA	Q	51A	51C	43.60	48.50	53.60	1	70.1	21.7	1
1.5SMC56A	1.5SMC56CA	Q	56A	56C	47.80	53.20	58.80	1	77.0	19.7	1
1.5SMC62A	1.5SMC62CA	Q	62A	62C	53.00	58.90	65.10	1	85.0	17.9	1
1.5SMC68A	1.5SMC68CA	Q	68A	68C	58.10	64.60	71.40	1	92.0	16.5	1
1.5SMC75A	1.5SMC75CA	Q	75A	75C	64.10	71.30	78.80	1	103.0	14.8	1
1.5SMC82A	1.5SMC82CA	Q	82A	82C	70.10	77.90	86.10	1	113.0	13.5	1
1.5SMC91A	1.5SMC91CA	Q	91A	91C	77.80	86.50	95.50	1	125.0	12.2	1
1.5SMC100A	1.5SMC100CA	Q	100A	100C	85.50	95.00	105.00	1	137.0	11.1	1
1.5SMC110A	1.5SMC110CA	Q	110A	110C	94.00	105.00	116.00	1	152.0	10.0	1
1.5SMC120A	1.5SMC120CA	Q	120A	120C	102.00	114.00	126.00	1	165.0	9.2	1
1.5SMC130A	1.5SMC130CA	Q	130A	130C	111.00	124.00	137.00	1	179.0	8.5	1
1.5SMC150A	1.5SMC150CA	Q	150A	150C	128.00	143.00	158.00	1	207.0	7.3	1
1.5SMC160A	1.5SMC160CA	Q	160A	160C	136.00	152.00	168.00	1	219.0	6.9	1
1.5SMC170A	1.5SMC170CA	Q	170A	170C	145.00	162.00	179.00	1	234.0	6.5	1
1.5SMC180A	1.5SMC180CA	Q	180A	180C	154.00	171.00	189.00	1	246.0	6.2	1
1.5SMC200A	1.5SMC200CA	Q	200A	200C	171.00	190.00	210.00	1	274.0	5.5	1
1.5SMC220A	1.5SMC220CA	Q	220A	220C	185.00	209.00	231.00	1	328.0	4.6	1
1.5SMC250A	1.5SMC250CA	Q	250A	250C	214.00	237.00	263.00	1	344.0	4.4	1
1.5SMC300A	1.5SMC300CA	Q	300A	300C	256.00	285.00	315.00	1	414.0	3.7	1
1.5SMC350A	1.5SMC350CA	Q	350A	350C	300.00	332.00	368.00	1	482.0	3.2	1
1.5SMC400A	1.5SMC400CA	Q	400A	400C	342.00	380.00	420.00	1	548.0	3.7	1
1.5SMC440A	1.5SMC440CA	Q	440A	440C	376.00	418.00	462.00	1	602.0	3.4	1
1.5SMC480A	1.5SMC480CA	Q	480A	480C	408.00	456.00	504.00	1	658.0	3.1	1
1.5SMC510A	1.5SMC510CA	Q	510A	510C	434.00	485.00	535.00	1	698.0	2.9	1
1.5SMC530A	1.5SMC530CA	Q	530A	530C	450.00	503.50	556.50	1	725.0	2.8	1
1.5SMC540A	1.5SMC540CA	Q	540A	540C	459.00	513.00	567.00	1	740.0	2.8	1
1.5SMC550A	1.5SMC550CA	Q	550A	550C	467.00	522.50	577.50	1	760.0	2.7	1
1.5SMC600A	1.5SMC600CA	Q	600A	600C	510.00	575.20	628.40	1	828.0	2.5	1

Notes:

For bidirectional type having VR of 10 volts and less, the IR limit is double.

1.5SMC-Q Series

Surface Mount – 1500W

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1:
Peak Pulse Power Rating Curve

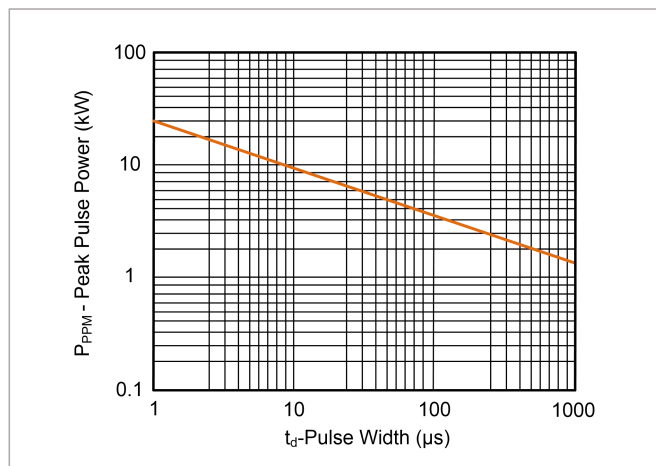


Figure 2:
Pulse Derating Curve

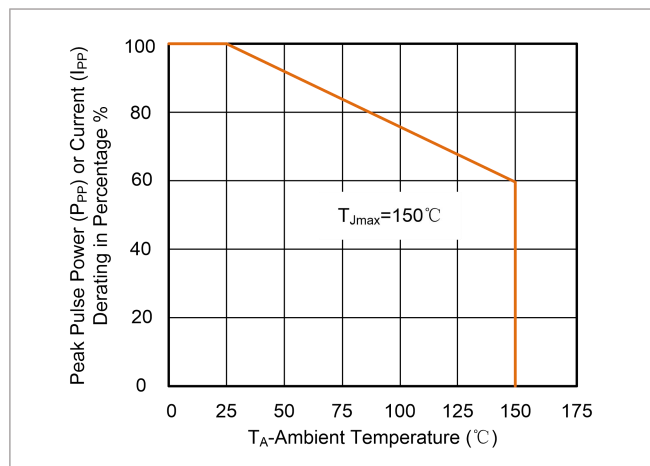


Figure 3:
Pulse Waveform

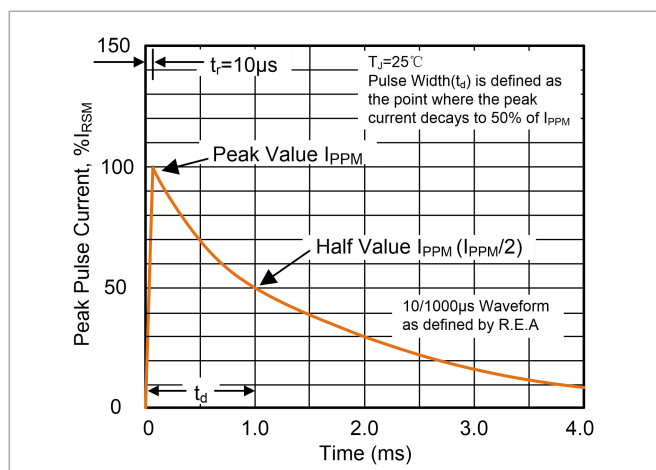


Figure 4:
Typical Junction Capacitance

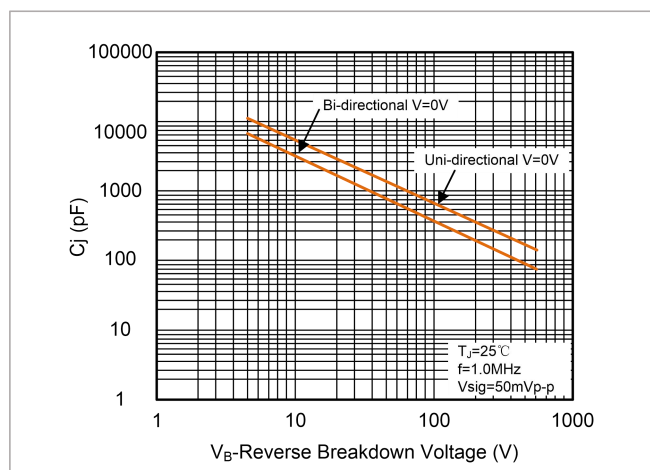


Figure 5:
Steady State Power Dissipation Derating Curve


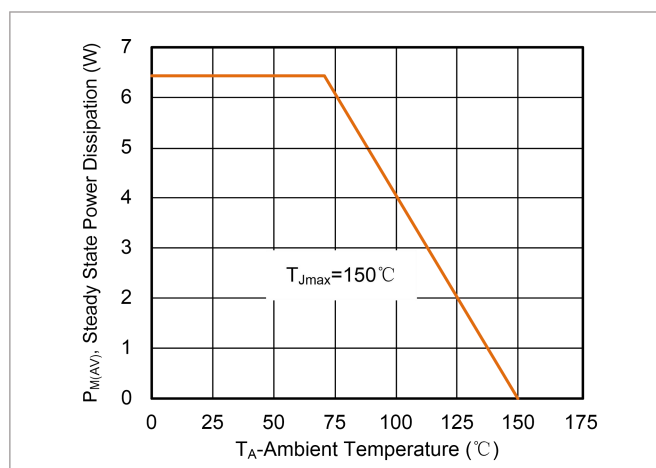


Figure 6:
Maximum Non-Repetitive Forward Surge Current Uni-Directional

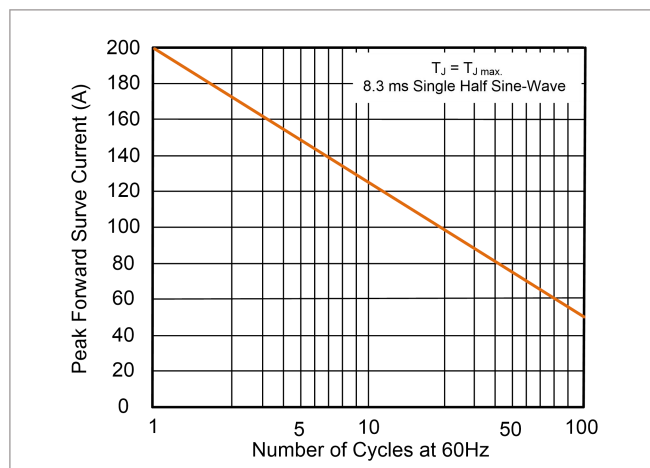


1.5SMC-Q Series

Surface Mount – 1500W


Soldering Parameters

Reflow Condition		Lead-free assembly
Pre Heat	-Temperature Min ($T_{S\ min}$)	150°C
	-Temperature Max ($T_{S\ max}$)	200°C
	-Time (min to max) (t_s)	60 – 180 secs
Average ramp-up rate(Liquidus Temp (T_L) to peak $T_{S\ max}$) to T_L-Ramp-up Rate		3°C/second max.
Reflow	-Temperature (T_L) (Liquidus)	217°C
	-Time (min to max) (t_L)	60-150 seconds
Peak Temperature (T_P)		260°C
Time within 5°C of actual Peak Temperature (t_P)		20-40 seconds
Ramp-down Rate		6°C/second max.
Time 25°C to Peak Temperature		8 minutes max.
Do not exceed		260°C

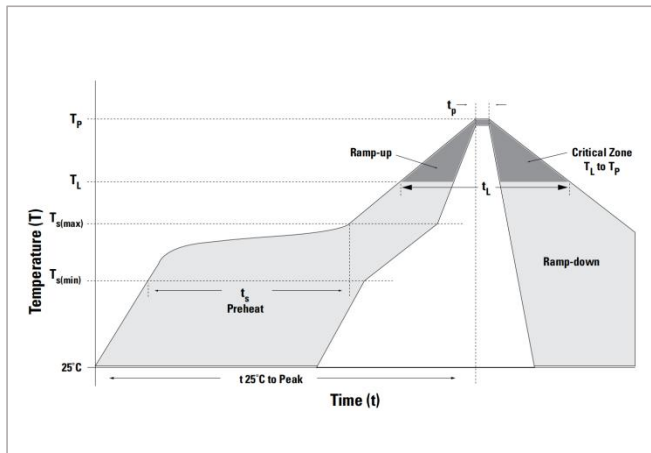


Dimensions

DO-214AB (SMC)

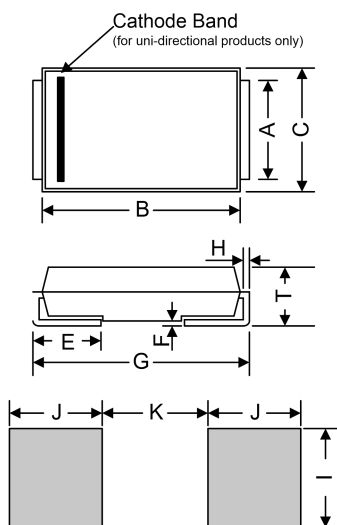


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.900	3.200	0.114	0.126
B	6.600	7.110	0.260	0.280
C	5.590	6.220	0.220	0.245
E	0.760	1.520	0.030	0.060
F	-	0.203	-	0.008
G	7.750	8.130	0.305	0.320
H	0.152	0.305	0.006	0.012
T	2.200	2.750	0.087	0.108
I	3.300	-	0.129	-
J	2.400	-	0.094	-
K	-	4.200	-	0.165

Part Numbering System

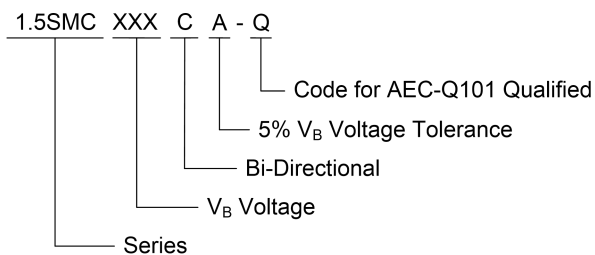

Part Marking System

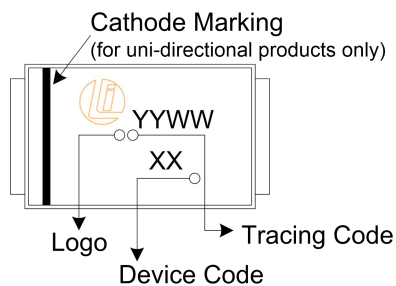


1.5SMC-Q Series
Surface Mount – 1500W

Packaging


Part number	Component Package	Quantity	Packaging Option	Packaging Specification
1.5SMCxxxXX-Q	DO-214AB	3000	Tape & Reel - 16mm tape/13" reel	EIA STD RS-481

Tape and Reel Specification


Tape

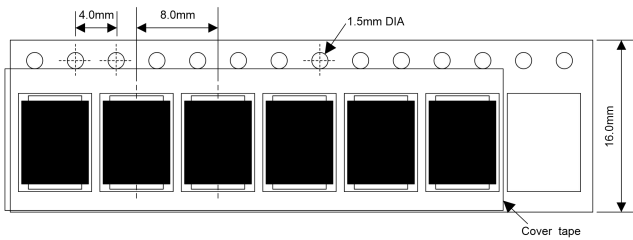

For Uni-Devices

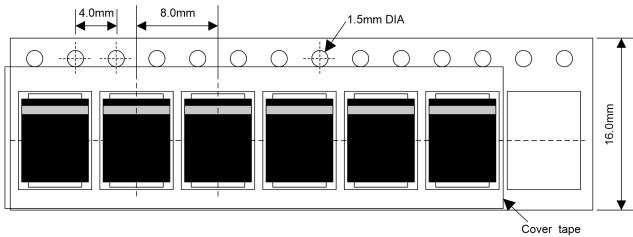

13 Inches Reel

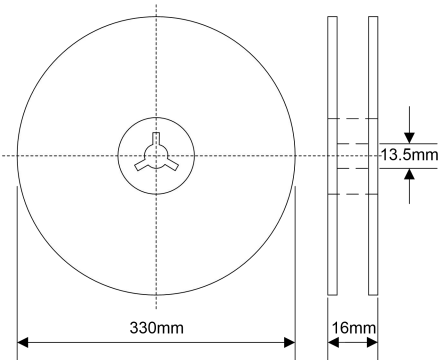

Quantity: 3000pcs/reel

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Liown products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.liownsemi.com>